

Narrow Span Scaffold Towers

Aluminum

4100 Series

Load Capacity: 25 lbs. per sq. ft. or
500 lbs. maximum per deck & scaffold

Includes guard rails, toeboards & planks with access door that allows end users to climb from inside.

23' Towers include additional fixed board (no access door).


Outriggers included on all towers shown.

These models meet the ANSI

Code as noted below (*NOTICE)

Narrow Span Scaffold Towers

- Easy and convenient to order
- Takes the guesswork out of what is required to meet Code
- Ideal for schools, hospitals and building maintenance

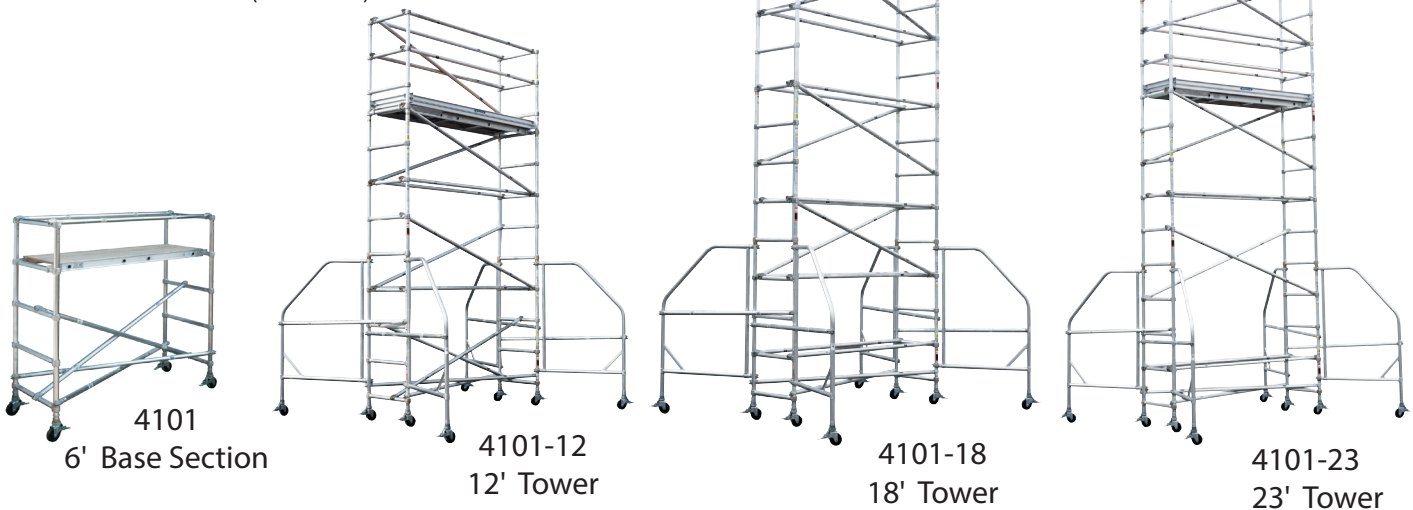

Narrow Span Scaffold Base Section

- Enables user to easily add to an existing scaffold tower
- Ideal for painting and remodeling contractors

****NOTICE - ALL SCAFFOLDS:** Maximum scaffold platform height is equal to 4x the smaller base section dimension of the scaffold or installed outrigger in most states except California which requires 3x. Check state and local codes.

Item No.	Model	Width	Length	Approx. Shipping Wt. Lbs.		
B049224	4101	29"	6'	121.0		
Item No.	Model	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
B524171	4101-12	6'	29"	12'	15'5"	350.0
B524172	4101-18	6'	29"	17'6"	20'11"	405.0
B524173	4101-23	6'	29"	23'	26'4"	451.0



#1 IN LADDERS™